

euro
led
lighting



OPRAWY HERMETYCZNA LED

HERMETIC LED LUMINAIRE/
FEUCHTRAUMWANNENLEUCHE FÜR LED

OPRAWA LINIOWA LED IP65

LED LINE IP65

LICHTBAND IP65

IP150



Integrated LED line tube and luminaire dedicated for general lighting of shop (ideal for shelves), warehouse, production facilities. Assembling on suspension leads or surface mounting. Light construction does not weight down roofs and it is perfect for suspended ceilings. Option: 3-phase power supply and dimming.


LED- Kompaktleuchte- kein Lampengehäuse nötig- geeignet für Geschäfts-, Industrie- und Lagerbeleuchtung (ideal für Regalsysteme). Aufhänge-Systeme oder Deckenmontage. Leichte Konstruktion belastet nicht die Decke. Ein idealer Ersatz für Doppelrohr -Gehäuse.

Zintegrowana oprawa oświetlenia liniowego przeznaczona do oświetlenia powierzchni sklepowych, magazynowych (idealna w systemach regałowych), produkcyjnych. Montaż linii zwieszany lub nastropowy. Lekka konstrukcja nie obciąża stropów i sufitów podwieszanych. Opcjonalnie możliwość ściemniania oprawą. Idealna jako zamiennik opraw świetłkowych w tym dwu świetłkowych.

DESCRIPTION / BESCHREIBUNG / DANE OPRAWY


| | | |
|--|-----------------------------------|----------------------------------|
| | Color temprature / Farbe / Barwa | 3000 / 4000 / 5000 / 5700 / 6500 |
| | Power / Leistung / Moc | 20 W - 60 W |
| | Beam angle / Abstrahlwinkel / Kąt | 110° |
| | Optics / Optik / Optyka | symmetric |
| | Flux / Lichtstrom / Strumień | 6592 lm - — lm |
| | CRI / Farbenwiedergabefaktor | Ra >80 |
| | Control / Steuerung / Sterowanie | ON/OFF / DALI |
| | Housing / Gehäuse / Obudowa | PCV |
| | Protection / Schutzart / Klasa IP | IP 65 |
| | Fixing / Montaż | on surface / on pole |
| | Color / Farbe / Kolor | white |

PHOTOMETRIC / PHOTOMETRIE / FOTOMETRIA

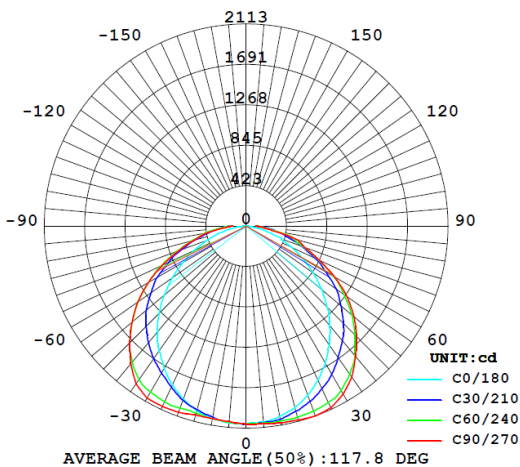

DIMENSIONS / ABMESSUNGEN / WYMIARY

| INDEX | L | H | W |
|-------|---------|-------|-------|
| IP150 | 1565 mm | 88 mm | 90 mm |

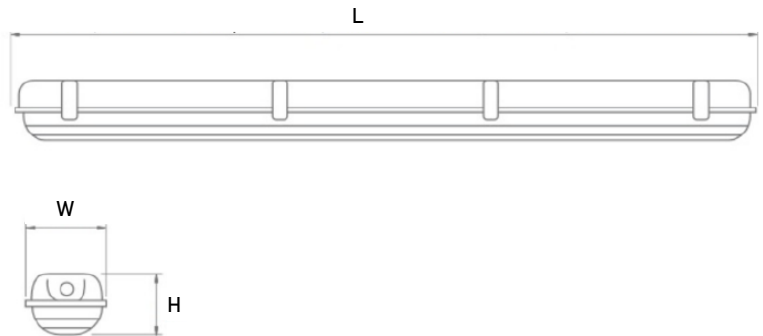

COLOR / FARBE / BARWA [K]

STANDARD

| | |
|---|------|
| W | 3000 |
| D | 4000 |
| A | 5000 |
| B | 5700 |
| C | 6500 |

| | LENGHT | TEMP | POWER | CONTROL |
|----|--------|------|-------|----------|
| IP | 151 | K | W | DALI |
| | | W | | OPTIONAL |
| | | D | | |
| | | A | | |
| | | B | | |
| | | C | | |

DALI DALI CONTROL
 Standard: ON / OFF
 Optional / Wahlweise: DALI
 Sterowanie standardowe: ON / OFF
 Opcjonalnie: DALI

IP150 - INDUSTRIAL LED FLOODLIGHT

| INDEX INDEKS | POWER LEISTUNG MOC | VOLTAGE SPANNUNG NAPIĘCIE | FLUX LICHTSTROM STRUMIEŃ | COLOR FARBE BARWA | CRI CRI CRI | DIMENSIONS ABMESSUNGEN WYMIARY |
|-----------------|--------------------------|---------------------------------|--------------------------------|-------------------------|-------------------|--------------------------------------|
| IP151D50 | 50 W | 230 V | 6592 lm | 4000K | CRI > 80 | 1565 x 88 x 90 mm |
| IP151D55 | 55 W | 230 V | 7417 lm | 4000K | CRI > 80 | 1565 x 88 x 90 mm |
| IP151D60 | 60 W | 230 V | 8241 lm | 4000K | CRI > 80 | 1565 x 88 x 90 mm |

Luminous flux tolerance / Lichtstrom-toleranz / Tolerancja strumienia świetlnego: ± 5%

